




- ◆ PU steering wheel and fork rollers as standard option for damp or harsh environments applications.

HLS

MANUAL HIGH LIFT PALLET TRUCK

Scissor lift pallet truck design to load and unload conveyor, feed presses, or any applications requiring moving and positioning pallets or containers of materials.

MODEL		HLS1000N	HLS1500N	SHLS1000N	SHLS1500N	
1.1	Capacity	kg	1000	1500	1000	1500
1.2	Min. fork height	H mm	85	85	85	85
1.3	Max.fork height	h mm	800	800	800	800
1.4	Size of fork	S mm	160x50	160x50	160x50	160x50
1.5	Fork overall width	W mm	540/680	540/680	540/680	540/680
1.6	Fork length	L mm	1150	1150	1150	1150
1.7	Size of load wheel	Φd mm	80x70	80x70	80x70	80x70
1.8	Load wheel		Nylon/PU	Nylon/PU	Nylon	Nylon
1.9	Size of steering wheel	ΦD mm	180x50	180x50	180x50	180x50
1.10	Steering wheel		Nylon/PU/Rubber	Nylon/PU/Rubber	Nylon	Nylon
1.11	Pump		Quick Lift	Quick Lift	Quick Lift	Quick Lift
1.12	Weight	kg	113/116	125/130	110/113	123/128
1.13	Material		NORMAL	NORMAL	STAINLESS	STAINLESS

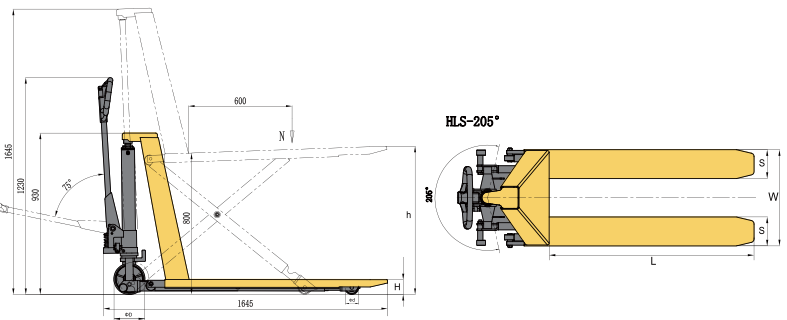

- ◆ Equipped with quick lift function doubles the lift speed for loads lighter than 200kg.
- ◆ With pressure relief valve and overload valve to prevent pump damages when loads exceeds weight limits.
- ◆ The enclosed fork tips and reinforced fork frames ensure long service life.

